

CANTILEVER LOAD CELL – MODEL : LDL


- ❖ *Good Linearity*
- ❖ *Good Repeatability*
- ❖ *Easy to Install*
- ❖ *Temp Compensated*
- ❖ *Wide Range*
- ❖ *Good Reliability*



SPECIFICATIONS

Rated Capacity	5, 10, 20, 30, 50, 100, 150, 200 Kgs		
Output Sensitivity	2 mV/V $\pm$ 0.25 %	Non Repeatability	$\pm$ 0.05 %
Input Resistance	350 $\pm$ 10 Ohms	Zero Balance	$\pm$ 2.0 %
Output Resistance	350 $\pm$ 5 Ohms	Compensated Temp. Range	- 20°C to 65° C
Excitation Voltage	10 to 15 Volts DC	Temp. effect on Zero	$\pm$ 0.005 % / °C
Non Linearity	$\pm$ 0.025 %	Temp. effect on Output	$\pm$ 0.005 % / °C
Hysteresis	$\pm$ 0.025 %	Safe Over Load	150 %
Creep	0.025 %	Protection Class	IP – 66

Dimensions :

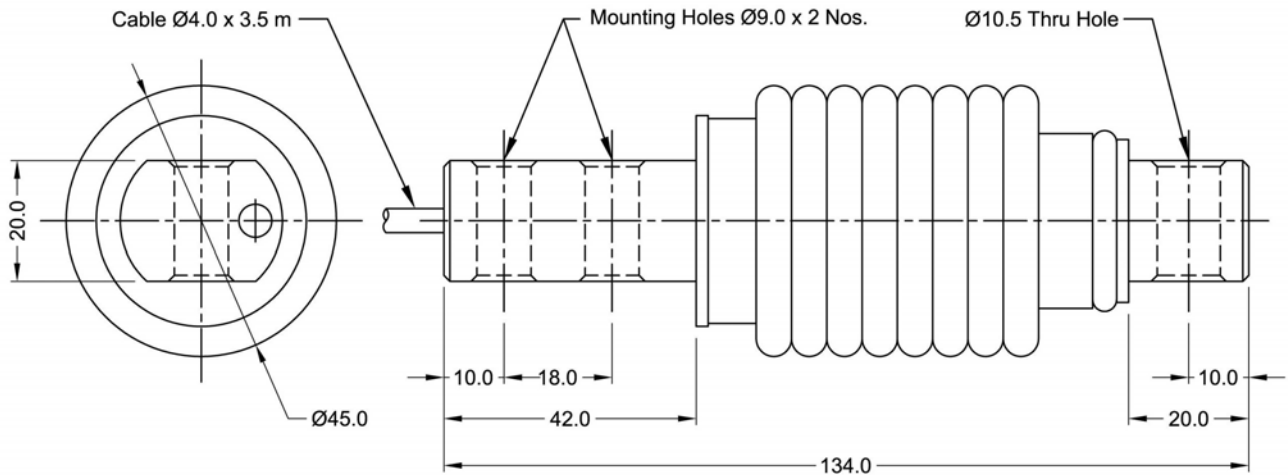

Please Communicate to :

EPOCH

Instruments & Controls Pvt. Ltd.

Office : MIG 132, 2nd Stage, 80 Feet Road, K.H.B. Colony, Basaveshwarnagar, Bangalore – 560 079.

☎ : 080 – 2348 1364, 6576 1259. ☎ : 080 – 2328 3728. E-mail : epochic@dataone.in.

Factory: No. 16, Bhadrappa Este, 54, Magadi Main Road, Kamakshipalya, Bangalore – 560 079.

☎ : 080 – 2328 7998. E-mail : epochinstruments@yahoo.com, Web : www.epoch-india.com.

Branch : 409, Kemp Plaza, B-Wing, Opp. Mind Space, Chincholi Bunder, Malad (West), Mumbai – 400 064.

☎ : 022 – 4003 0704, 4003 0705, 4003 0706. ☎ : 022 – 4003 0707. E-mail : synapsis@vsnl.com.