

COMPRESSION LOAD CELL

SPECIAL FEATURES


- ✎ *Easy to Install*
- ✎ *Good Reliability*
- ✎ *Good Repeatability*
- ✎ *Temperature Compensated*



SPECIFICATIONS

Model	:	LCD – 51, 12, 22, 32, 52, 751, 13, 23.
Rated Load Capacity	:	50, 100, 200, 300, 500, 1000, 2000 Kgs.
Rated Output Sensitivity	:	2 mV/V $\pm$ 0.25 %.
Input Resistance	:	350 $\pm$ 10 Ohms.
Output Resistance	:	350 $\pm$ 3 Ohms.
Excitation Voltage	:	10 to 12 Volts DC/AC (RMS).
Non Linearity	:	$\pm$ 0.025 % of Rated Output.
Hysteresis	:	$\pm$ 0.025 % of Rated Output.
Non Repeatability	:	$\pm$ 0.10 % of Rated Output.
Zero Balance	:	2 % of Rated Output.
Operatable Temperature Range	:	0°C to 65° C.
Storage Temperature Range	:	- 20° C to 85° C.
Temperature Effect on Zero	:	0.005 % of Rated Output/°C.
Temperature Effect on Output	:	0.010 % of Rated Output/°C.
Over Load Rating, Safe	:	150 % of Rated Capacity.
Over Load Rating (Ultimate)	:	200 % of Rated Capacity.


Dimensions : -

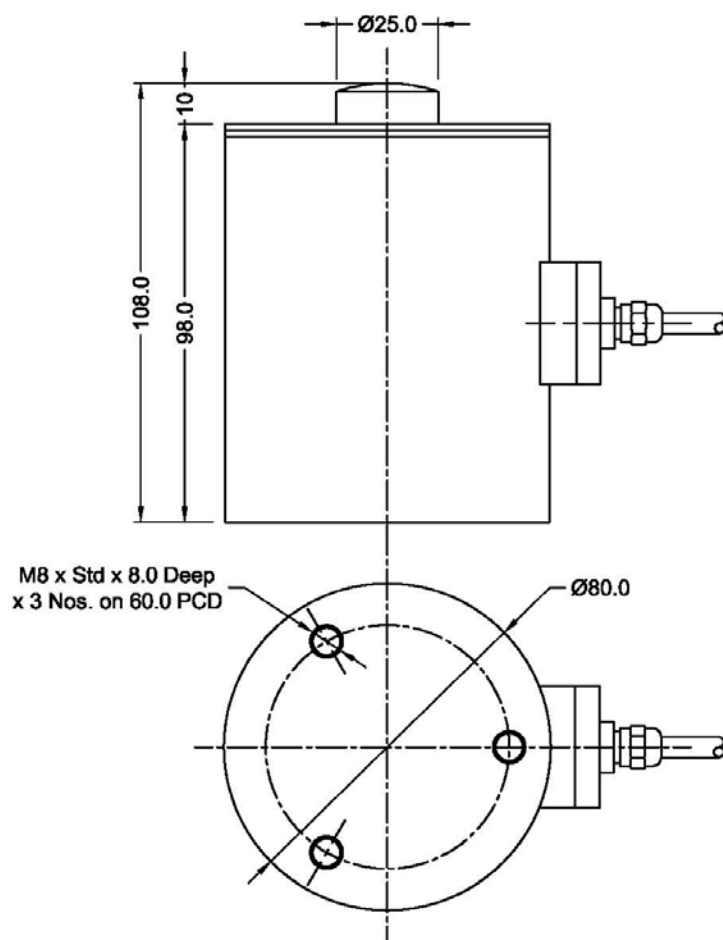

CONNECTION DETAILS

COLOUR	CONNECTION
RED	+ VE EXCITATION
WHITE	+ VE OUTPUT
BLACK	- VE EXCITATION
GREEN	- VE OUTPUT
BARE	SHIELD

ELECTRICAL INFORMATION

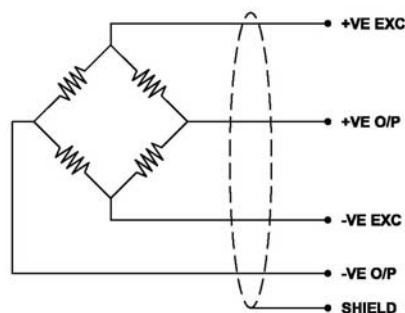

Please Communicate to :

EPOCH

Instruments & Controls Pvt. Ltd.

Office : MIG 132, 2nd Stage, 80 Feet Road, K.H.B. Colony, Basaveshwarnagar, Bangalore - 560 079.

☎ : 080 - 2348 1364, 6576 1259. ☎ : 080 - 2328 3728. E-mail : epochic@dataone.in.

Factory: No. 16, Bhadrappa Este, 54, Magadi Main Road, Kamakshipalya, Bangalore - 560 079.

☎ : 080 - 2328 7998. E-mail : epochinstruments@yahoo.com, Web : www.epoch-india.com.

Branch : 409, Kemp Plaza, B-Wing, Opp. Mind Space, Chincholi Bunder, Malad (West), Mumbai - 400 064.

☎ : 022 - 4003 0704, 4003 0705, 4003 0706. ☎ : 022 - 4003 0707. E-mail : synopsis@vsnl.com.